

WIRELESS MICRO

ULTRA-COMPACT WIRELESS MICROPHONE CAMERA KIT


The Wireless Micro Camera Kit is a powerful, pocket-sized solution for capturing pristine audio using any camera or smartphone. With two clip-on transmitters featuring in-built microphones and a choice of receivers that connect directly to any camera or USB-C smartphone, you can start recording in seconds. Intelligent GainAssist technology ensures your audio is always crystal clear, while an intuitive AMOLED screen on the camera receiver provides quick and easy control. With extended battery life from the included charging case plus plug-in power detection, it's the ultimate grab-and-go microphone for any shoot.

- Ultra-compact wireless microphone with universal camera connectivity
- In-built microphones and automatic pairing for easy use
- Intelligent GainAssist technology for perfectly balanced audio
- Camera Receiver delivers best-in-class range with a 1.1" AMOLED screen for quick configuration
- Extended battery life with included charging case and plug-in power detection
- Included USB-C Smartphone Receiver for ultimate flexibility
- Ultra-lightweight form factor with a sleek design for discreet on-camera presence and elegant aesthetic
- Integrated windshields (with additional furry windshields) for clear outdoor recordings
- Direct Connect enables seamless connectivity to iOS smartphones via Bluetooth® through the RØDE Capture app



ACOUSTIC & ELECTRICAL SPECIFICATIONS (WIRELESS MICRO)

Polar Pattern:	Omnidirectional
Frequency Range:	20 Hz – 20 kHz
Maximum SPL:	135 dB SPL
Equivalent Noise (A-Weighted):	21 dBA
Signal-to-noise Ratio:	73 dB
Transmission Range:	Over 100m
Digital Connectivity:	USB-C
Sample Rate:	48kHz
Bit Depth:	24-bit
Operating System Requirements:	iOS 14 and above Android 11 and above
Operating Time:	TX: 7 hours RX: 7 hours
Power Requirements:	TX: In-built rechargeable lithium-ion battery, charged via Pogo-pin contacts to Charging Case (5V, 0.1A) RX Camera Receiver: 5V/0.1A RX Smartphone Receiver (USB-C): 5V/0.1A

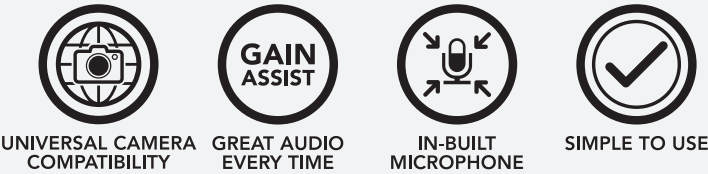

RØDE

ELECTRICAL SPECIFICATIONS (CHARGING CASE)

Battery Capacity:	490 mAh
Power Requirements:	5V/0.5A via USB-C
Charging Time:	2 hours
Charge Current:	0.5A
Total Charges:	2 charges (extra 14 hours of operation)
Connection Type:	USB-C

MECHANICAL SPECIFICATIONS

Weight (grams):	Charge Case: 78.4
	TX: 12.3 (without magnet), 17.8 (with magnet)
	RX Camera Receiver: 19.3
	RX Smartphone Receiver: 5.6
Dimensions (millimetres):	Combined: 121.1
	Charge Case: 96.75 x 57.6 x 30.4
	TX: 40.35 x 19.52 x 16.85
	RX Camera Receiver: 44.65 x 16.85 x 27.85
	RX Smartphone Receiver: 43.7 x 24 x 9.2

WHAT'S IN THE BOX



2 x Transmitters (TX)



1 x Smartphone Receiver (RX)



1 x Camera Receiver (RX)



1 x Charging Case



1 x SC2 TRS to TRS Cable



1 x SC22 USB-C to USB-C Cable




2 x Furry Windshields



2 x Magnetic Attachments
(for TX)

POLAR PATTERN

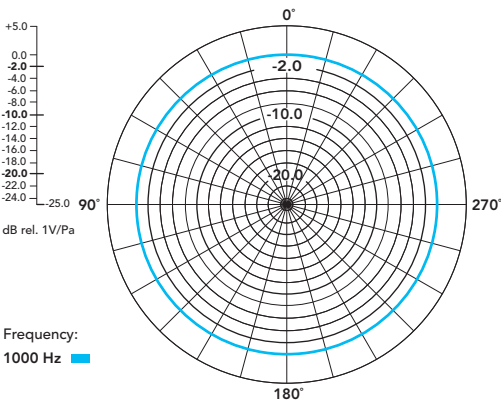

FREQUENCY RESPONSE

